

Hydraulic Excavator Pump Attachment - 12 Inch

MODEL #	
12-Inch EXH 12000 Hydraulic Excavator Attachment	
OPERATING LEVELS	
MIN FLOW	1800 GPM
MAX FLOW	7000 GPM
HEAD RANGE	Up to 200 ft
DISCHARGE SIZE	12 inch
SUCTION SIZE	14 inch
SOLIDS HANDLING	Solids up to 11 inches
MAX SPEED	1800 RPM
PERCENT SOLIDS	Up to 40-70% Solids
CU YD MATERIAL HR	500-600





*Typical Attachment Photo. Photos for general guidance. Contact us for further details.

RECOMMENDED SENSORS
Hydraulic Pressure Gauge for pumps and cutter head circuit to operator (0-6000 PSI)
Magnetic Flow meter to maintain stable plug free pipeline flow and maximize production

REQUIRED EQUIPMENT TO OPERATE ATTACHMENT
EDDY Pump circuit requirements from excavator auxiliary power OR from Hydraulic Power Unit 160-200 GPM at 5000 PSI (750cc motor)
Cutterhead circuit requirements from excavator auxiliary power OR from Hydraulic Power Unit 12-20 GPM at 5000 PSI
12" material handling discharge hose and hydraulic lines plumbed out to the end of the boom
Crossover check valve to prevent damage to hydraulic motor and prevent pump rotor from coming off

OPTIONAL EQUIPMENT TO ENHANCE OPERATION OF DREDGE
Magnetic flow meter
Discharge line pressure gauge (0-150 psi)
"Quick Prime" Valve (requires small 24volt air system)
Pivot mounted Discharge hose carrier (adaptable to most machines)
Liner Safe Roller Attachment, Self Cleaning Mud Guard, Water Jetting Ring are additional options for your project.
Recirculation system for pre-mixing applications (requires small 24 volt air system)

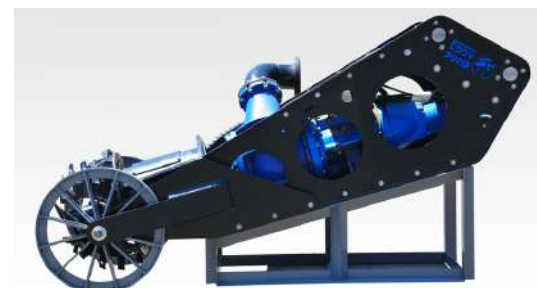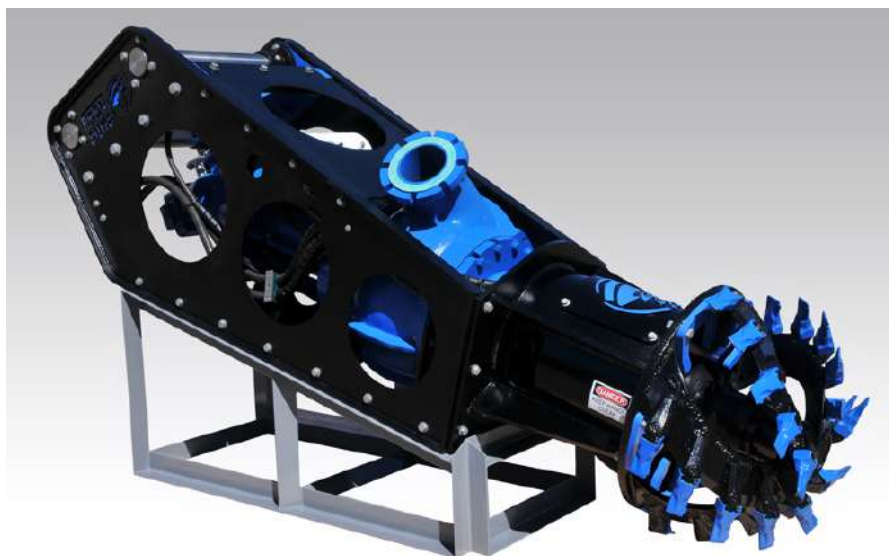

EDDY Pump industrial Excavator Dredge Pump Attachments are non-clog pumps designed for high solids industrial pumping applications. Our patented pump technology outperforms all centrifugal, vortex and positive displacement pumps in a variety of the most difficult pumping applications.

Available in alternative power options and pump sizes depending on your application.

Applications

- Mining
- Chemical
- Sand & Agg
- Oil and Gas
- Paper & Pulp
- Fly Ash & Coal Ash

Features and Benefits

- Non-Clog, High Viscosity, High Specific Gravity, High Abrasives, Low pH Pumping Design
- Transport 40-70% Solids
- Ability to pump objects of up to 9-inches in diameter

Fluid Pumped

- Sludge
- Slurry
- Drilling Mud
- Mine Tailings
- Grit
- Sand Mixtures

GENERAL SPECS		
Production: 4000-7000 GPM or 500-600 cubic yards of material per hour		
Head with 750cc hydraulic motor (23" rotor) 200 gpm oil @5000PSI	Up to 200 feet	Up to 60.96m
Overall Weight (without optional equipment)	9,500 lbs	4310 kg
Overall Length	191 inches	4.85 m
Overall Height	60 inches	1.5 m
Overall Width with discharge pipe removed	58 inches	1.47 m
Overall Width with discharge pipe mounted (right side)	71 inches	1.80 m
Carrier Weight Range	30 + tons	27,215+ kg
Rotating Head Diameter (with or without cutting teeth)	35 inches	.90 m
Double seal with Sealed Barrier fluid tank (allow dry run)	3.5 inch	89 mm

WE PUMP SOLIDS, NOT WATER




PUMP CURVE

A pump curve is a graphical representation of a pumps ability to produce flow against a certain head. The science is matching a curve that is accurate for your project, leading to the proper pump selection and best efficiency.

EDDY Pumps are primarily used for high solids, slurry, sludge, and dewatering.

EDDY Pump - 12 Inch EXH 12000 Hydraulic Excavator Attachment - Pump Curve

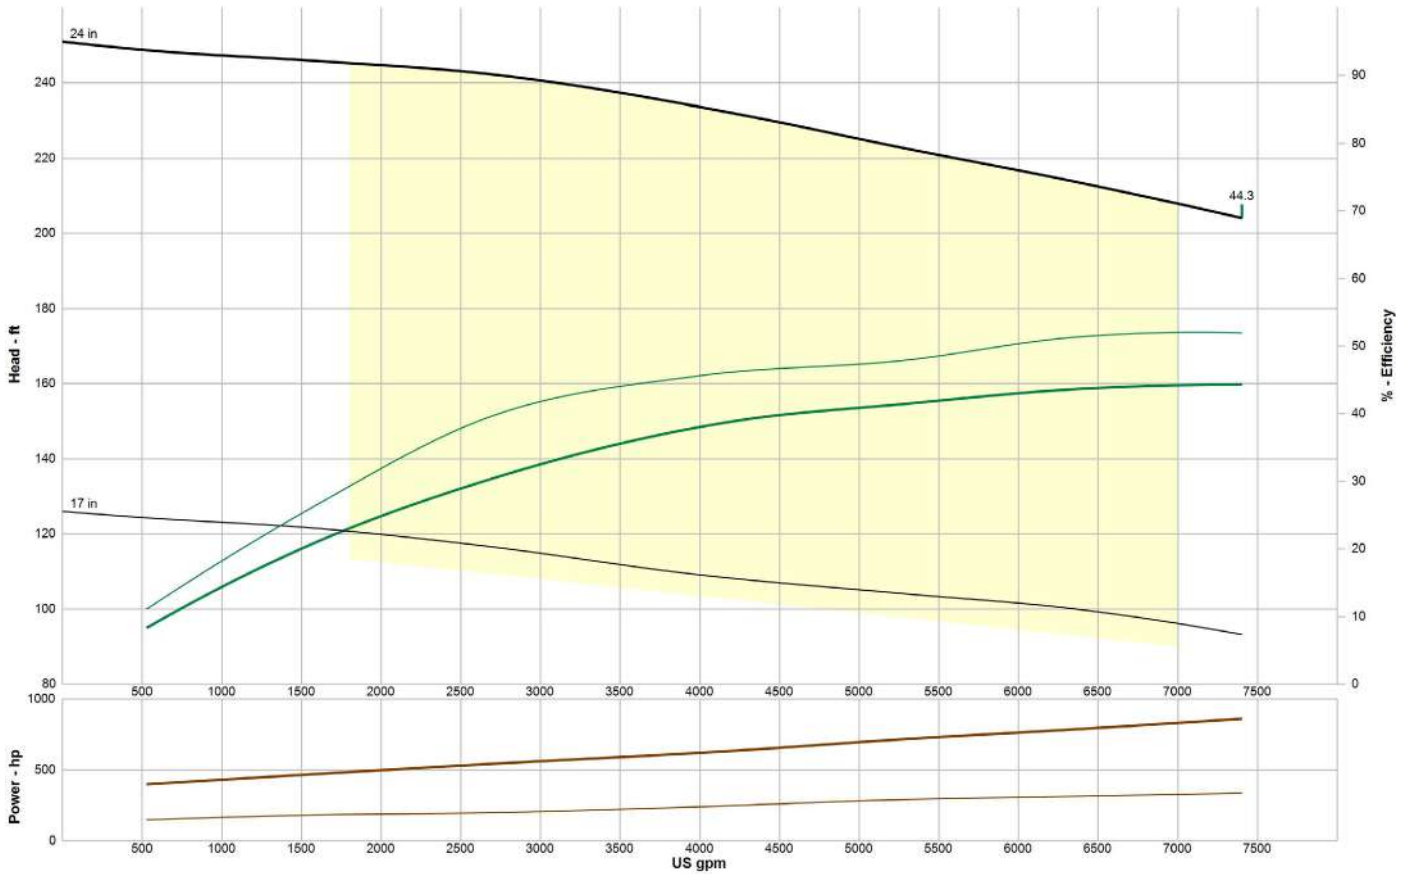

*General pump curve based on water at 1200 RPM. Contact us with your specific material for a custom pump curve.

WE PUMP SOLIDS, NOT WATER

CONTACT US



(619) 258-7020



info@EddyPump.com